



FILAMENT WOUND FIBERGLASS TANK OPTIONS:

1. ABOVE OR BELOW GROUND INSTALLATION
2. POTABLE OR NON POTABLE WATER
3. FIRE PROTECTION
4. SEWAGE HOLDING OR SEPTIC TANK
5. HOLD-DOWN STRAPS FOR WATER TABLE CONDITIONS
6. SIZE OF MANWAY - TO SUIT APPLICATION
7. FITTINGS - FLANGED FRP
8. HEAT TRACE & INSULATION

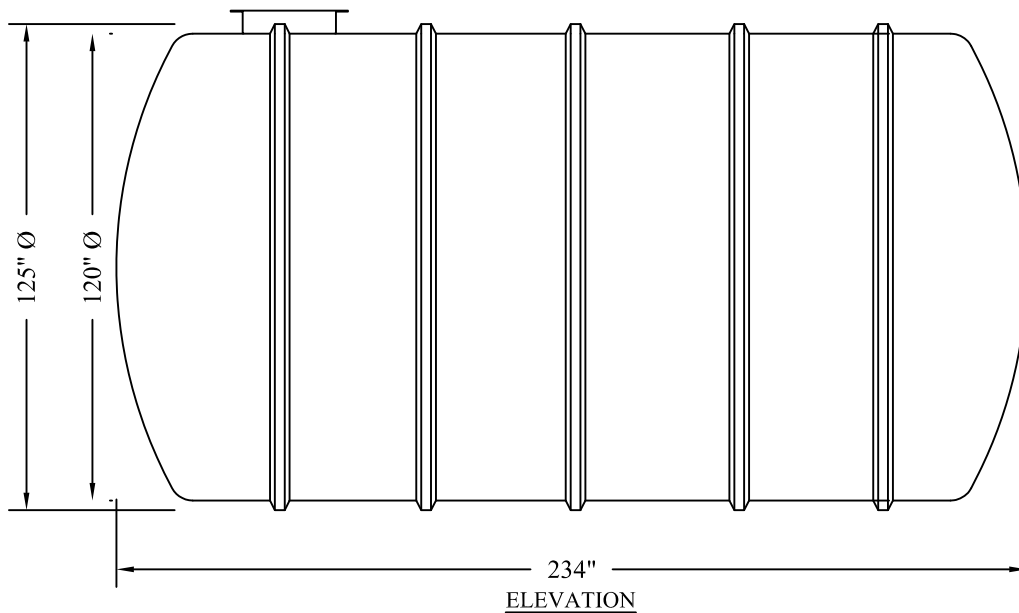

MODEL No. FRP9000-10H  
 TOT. CAP. - 9,000 gals

NOTES:	<u>PROJECT</u>			
TOTAL VOLUME LITERS: 40,314 U.GALS: 9,000	 <b>CANWEST TANKS &amp; ECOLOGICAL SYSTEMS LTD.</b> <a href="http://www.canwest-tanks.com">www.canwest-tanks.com</a>			
LENGTH METRIC (mm): 4,953mm IMPERIAL (Ft.): 19.5'				
DATE: DRAWN BY: L J				